

Presentation



The clips affixed joint covers are designed to provide an attractive and decorative low cost solution to the problem of protecting and concealing expansion joints in the structure of a building.

They are suitable for use in new and refurbishment projects for walls, ceilings and floors.


Fast and easy to install, the clips affixed joint covers are produced in aluminium, PVC and brass extrusions.

They will successfully span joints up to 150 mm in all types of buildings : office buildings, shopping malls and retail stores, schools, hospitals, hotels, blocks of flats, municipal buildings, leisure centres, factories, airport terminals, rail terminals, etc...


RAL color chart

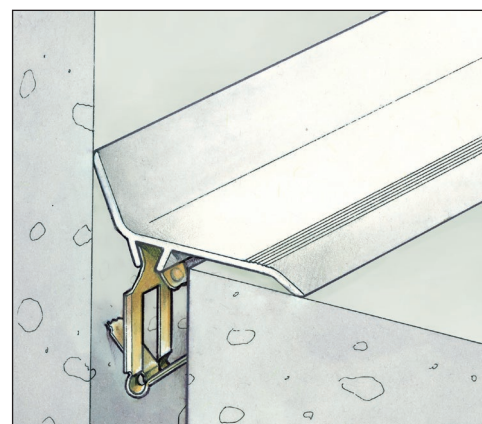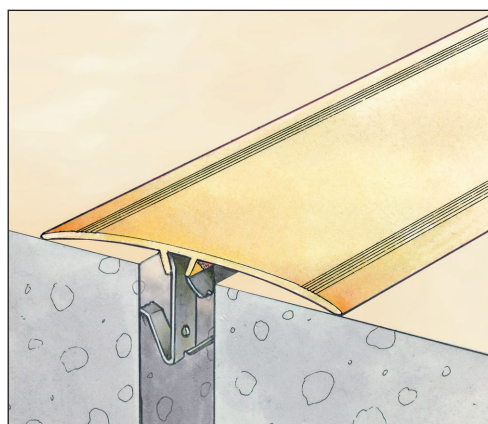


CLIPS AFFIXED JOINT COVERS FOR STANDARD AND SEISMIC STRUCTURAL MOVEMENT JOINTS




1. Insert a fastening clip



2. Insert head of the following clip alternatively



3. Push firmly into joint



4. Joint cover in place

Extruded aluminium

The extruded aluminium clips affixed joint covers can be used for exteriors and interiors. They are made of 6063 T6 aluminium alloy and can be finished with a 15 micron thick natural (colourless) anodizing layer. They are available from stock in 3 meter lengths in the following widths :

Flat models :

- 50, 60, 70, 90, 120, 140, 180 and 210 mm.

Angle models :

- 50, 60, 70, 90 and 120 mm.

Aluminium clips affixed joint covers can also be supplied powder-coated, upon request, in any RAL colour.

All models can be supplied mill or anodized finished.

Non standard lengths and drilled profiles can be supplied on special orders.

Please contact us for quantities and conditions.


Extruded PVC

The extruded PVC clips affixed joint covers can be used for exteriors and interiors. The colours white RAL 9016, cream RAL 1015 and grey RAL 7035 are available from stock in 3 meter lengths in 50, 70 and 90 mm wide, flat and angle models.


Please contact us for any special model or colour.

Extruded brass


The extruded brass clips affixed joint covers are available from stock in 3 meter lengths in 90 mm wide, flat model only. Polishing can be made upon request.



Clip S : for structural gaps varying in width from 10 to 35 mm.



Clip SLL *: for structural gaps varying in width from 35 to 80 mm.



Clip XL *: for structural gaps varying in width from 60 to 110 mm.



Clip XXL *: for structural gaps varying in width from 100 to 150 mm.

* Patented models

How to choose a clips affixed joint cover

The extruded clips affixed joint covers successfully cover joints from 10 to 150 mm using specially developed spring clips.

The flat joint covers for facades, walls and ceilings are referenced as CJV profiles. The flat joint covers referenced as CJH (light floors) and CJHL (heavy duty floors) profiles. The CJHL profiles have been developed to withstand heavy pedestrian traffic and light vehicles up to a maximum axle load of 6 kN. Corner profile have same references with the letter «A» at the end.

The number which follows the letters always indicates the width of the joint cover in mm.

Fixing clips

The joint covers can be affixed by using specially designed spring clips manufactured from stainless steel which do not corrode and remain permanently flexible without loss of elastic recovery, thus providing an extremely positive fixing. 4 models of fixing clips adapted for joint widths from 10 to 150 mm are available from stock. These unique and particularly innovative clips are protected by international patents.




The choice of the clip model will be based on the initial joint width.

Special models can be studied and manufactured for specific situations such as chamfered joints. Please consult our technical department for more details.


FOLDED JOINT COVERS

For facades, walls and ceilings, are used when a clips affixed profile cannot be installed.

For heavy duty traffic floors, to be mechanically or chemically affixed.

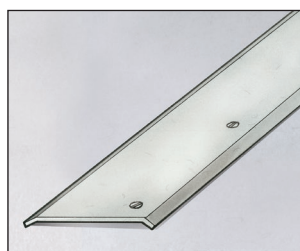

Galvanized steel, mill finish aluminium, powder coated aluminium, anodized aluminium, stainless steel. For facades, floors, walls and ceilings in thickness from 10/10^e to 30/10^e mm.

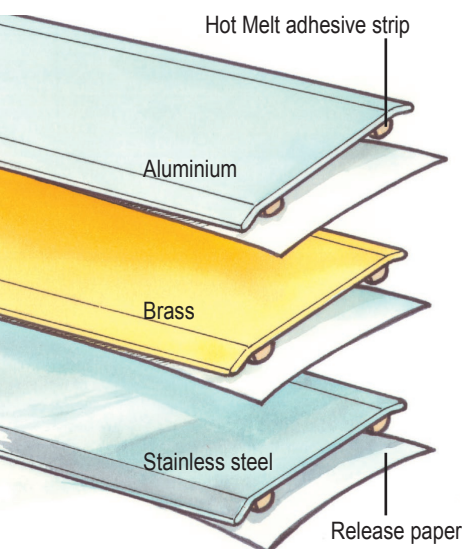

ADHESIVE JOINT COVERS

For concealing joints mainly in walls and floors where limited movements are expected.

- **Silver anodized ALUMINIUM : mill finish, colourless**

6060 alloy. Available in 60, 80 and 100 mm wide.
Standard length : 3 lm.

- **Polished BRASS : with protection film**

According to UNI 4892. 13/10^e thick. Available in 50, 60, 80 and 100 mm wide.
Standard length : 3 lm.

- **Polished STAINLESS STEEL : with protection film**

According to NF EN 10088-2. 12/10^e thick. Available in 50, 60, 80 and 100 mm wide.
Standard length : 3 lm.

© All rights reserved - Non contractual drawings - 02/2014



GV2 - VEDA FRANCE

20, Allée des Erables - 93420 Villepinte - France

Adresse Postale

CS 63052 - 95972 Roissy CDG Cedex

Tél : + 33 (0)1 48 61 70 80

Fax : + 33 (0)1 48 61 70 81

E-mail : contact@vedafrance.com

Web : www.vedafrance.com