



K465 Knauf Perfix

Bonding Gypsum for Dry Lining

Product Description

Knauf Perfix is a stucco gypsum with factory-blended additives.

Order information

30 kg bag Material no. 00003110

Storage

Store bags dry on wooden pallets.
Can be stored for 6 months.

Fields of Application

Knauf Perfix is used to apply the following products to walls:

- Knauf Boards
 - Insulation (hard foam and mineral wool boards)
 - Knauf Composite Boards EPS, MW or Knauf InTherm
- on regular substrates with a rough and absorbent surface.

Properties

- powdery ready to mix
- gypsum-based
- easy to blend
- paste-like consistency
- good bonding
- efficient
- rapid increase of bonding strength after initial setting
- application time approx. 30 minutes

Application

Application temperature / climate

Do not apply Knauf Perfix at temperatures below +10 °C (50 °F).

Application time

Applicable for approx. 30 minutes after making putty, depending on conditions of substrate. Application time is shortened if unclean pails (containers) and tools are used. Finish the fixing and aligning of the gypsum boards before the hardening of Knauf Perfix commences.

Special notes

Do not mix Knauf Perfix with other materials as properties can change significantly in this case. Clean tools with water immediately after use.

For the application of composite boards, and if air tightness is required, it can be necessary to consider further measures according to Knauf Technical Data Sheet W61.

Consumption / Efficiency

Consumption of material

- approx. 5 kg Perfix per m² dry lining

Efficiency per 30 kg bag of Perfix:

- approx. 6 m² Knauf Boards can be glued as dry lining with 30 kg of Perfix

K465 Knauf Perfix

Bonding Gypsum for Dry Lining



Application




Pre-treatment of substrate

The substrate has to be substantial, solid, clean and dry, concrete surfaces sufficiently dry and free of sinter layers and concrete release agents. Prime smooth, non-absorbent concrete surfaces with Knauf Betokontakt as bonder.

Coat well-soaking surfaces with Knauf Grundiermittel (primer), diluted with water at a ratio of 1:3.

Mark board edges for exact alignment of Perfix dabs.

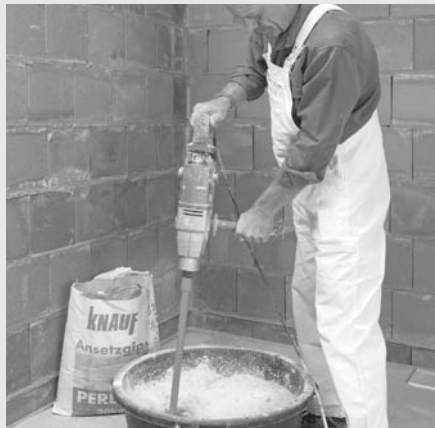

Mixing

Sprinkle 30 kg Perfix in approx. 16 l water and mix with Putty Mixer to a paste-like compound.



Application of Perfix dabs

In the case of an uneven substrate apply dabs of Knauf Perfix with a spacing of approx. 35 cm.

For strongly uneven backgrounds underpin with 10 cm wide board strips and Knauf Perfix.



Gypsum Composite Boards PS and MW

Push a thin layer of Knauf Perfix into the adhesion area of the insulation layer using the Finishing Trowel when applying Gypsum Composite Boards.



Application of boards, pounding and alignment

Press Knauf Boards or Gypsum Composite Boards perpendicular and horizontally on the substrate and attach by pounding with straight edge. Pounding and aligning of the boards has to be finished before hardening of Knauf Perfix commences.



The minimum thickness of dabs should be 5 mm after alignment of boards.



Application at door openings and power sockets



Board joints should be tight and filled with Uniflott/impregnated Uniflott / TRIAS / Fugenfüller Leicht* / Jointfiller Super*.
* with Knauf Joint Tape Kurt

Knauf Direct

Technical Information Service:

▶ Tel.: +49 9001 31-1000 *

▶ Fax: +49 1805 31-4000 **

▶ www.knauf.de

Knauf Drywall and Floor Systems Am Bahnhof 7, 97346 Iphofen, Germany

* A rate of 0.39 € per minute will be charged for calls from within the German landline network. Callers whose phone numbers are not registered in the address database of Knauf Gips KG, i.e. private builders or non-patrons, will be charged a rate of 1.69 € per minute. Calls from mobile phones will be charged 1.48 € per minute..

** 0,14 €/Min.

© All technical changes reserved. Only the current printed instructions are valid. Our warranty is expressly limited to our products in flawless condition. All application quantities and delivery amounts are based on empirical data that are not easily transferable to other deviating areas. The stated information represents current state-of-the-art Knauf technology. The entire state of approved engineering rules, appropriate standards, guidelines, and rules of craftsmanship are not included herewith. These and all application instructions have to be adhered to separately by the installer. All rights reserved. All amendments, reprints and photocopies, including those of excerpts, require the express permission of Knauf Gips KG, Am Bahnhof 7, 97346 Iphofen, Germany. Delivery via professional building material distributors only, in accordance with our current business, delivery and payment terms.

